



### GENERAL SPECIFICATIONS

Bore diameter:	20mm (0.8")
Total length:	43 cm (17")
Total weight:	1.8 kg (4.0 lbs.)
Height on stand:	38 cm (15") maximum
Composition:	Titanium, Stainless Steel, Aluminium
Ignition voltage:	P-Series Blasting Machine; 24 volts; 1 amp
Laser system:	20mm Single or Dual Pointer Assembly
Liquid projectile:	100 mL (3.4 oz.)
Liquid load:	100 mL (3.4 oz.)
Peak liquid projectile velocity:	459 m/s (1,506 ft/s)
Kinetic energy:	7.2 kJ
Recoil impulse:	45.9 N.s
Vertical adjustment:	180°
Horizontal adjustment:	360°, for multi-purpose positioning
Barrel composition:	Titanium
Barrel length:	38 cm (15")
Barrel weight:	1.4 kg (3.1 lbs.)

Product specifications and images are subject to change without notice.

### DESCRIPTION

The 20mm Neutrex, the original disrupter that led Proparms to become a world leader in disrupter technology, is also available in titanium. It is a highly versatile, all purpose disrupter, and can be used in a variety of situations, including underwater. The 20mm Neutrex Titanium may be used in either manual or robotic deployment and its reduced weight minimizes the possibility of damage to robotic platforms. No tools are required for a 2 ½ minute setup and preparation. Maximum recommended standoff is 3 metres (10 ft.) dependent on target.


### AMMUNITION

- A - Electrically primed - 40, 45, 50, 55, Magnum 70 grain
- B - Percussion primed - 30, 35, 40, 50 grain
- C - 20mm Avon Frangible
- D - 20mm Flathead Steel Slug
- E - Gel Shot

*Ammunition is not included as part of the system.*

*Percussion Breech also available.*

*Warranty valid only with the use of Proparms ammunition.*

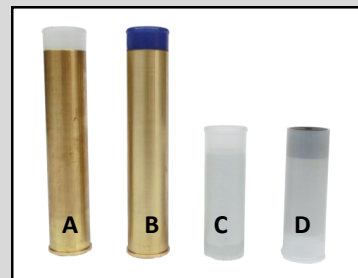

### ACCESSORIES



P2  
Blasting Machine



Wire Wheel  
100 m (330 ft)



RAM  
Recoil Absorbing  
Mechanism



20mm Single  
Laser



20mm Dual  
Laser



Bore  
Laser Kit



Universal  
Knapsack